


NNPB ITEM

STANDARD ITEM

500ml ROUND NR BEER BOTTLE

MAX VERTICAL LOAD 4000N	MAX INTERNAL PRESSURE AT 20°C 3.0bar
REFILLABLE	NON-HEAT TREATED YES
CAPACITY 500.0ml	CAPACITY 528.5ml
FILLPOINT ±6.0ml	BRINFUL ±. ml
VACUITY 5.74	FILLPOINT 62.0TENT
APPROX MASS 300g	±10.0ml
FINISH 26 STANDARD C.E.T.I.E.	0222
CROWN - GME 13.01	25.0
MINIMUM THROUGH BORE 17.0	(UGO-0870)
REVISION 3	
REVISION 2	
REVISION 1	14-12-07
0-1 SYMBOL RE-POSITIONED TO OPPOSITE HALF, C/D3 DOT CODE CENTRALISED. LH.	
DESPATCHED	
APPROVED	
CHECKED	
FILE REF	URH 226.71 SDS -----
LEE HOMER - 01279 773042 - 21-03-07	
DRAWING NUMBER	SAP NUMBER
BL032-1	005091

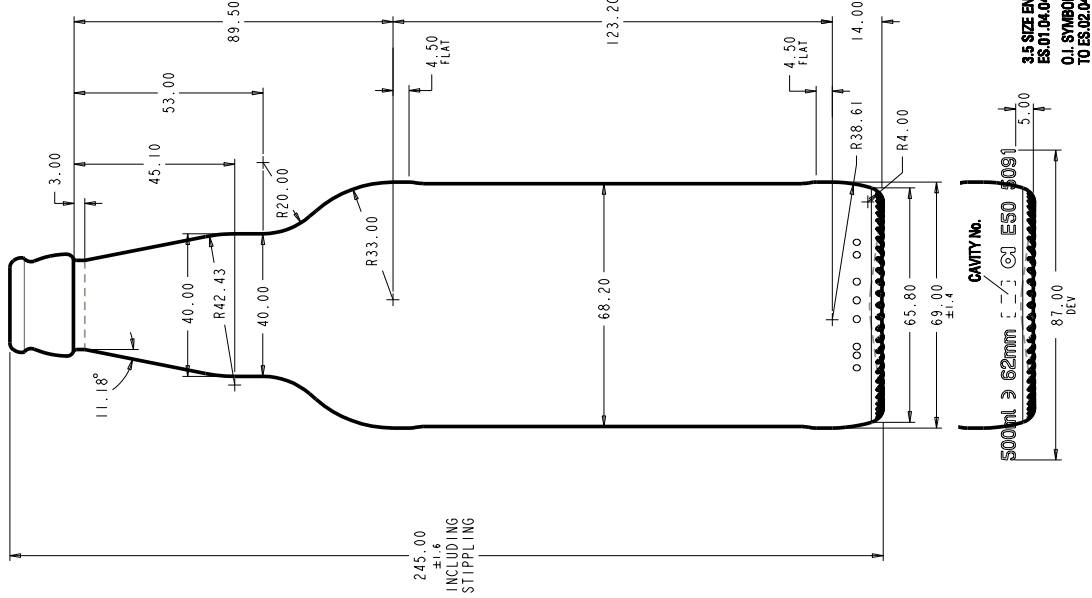

NOTES:

SEE BDMC TEC 4 FOR TOLERANCE INTERPRETATION.
SEE BDMC TEC 7 FOR CARBONATED BEVERAGES.
UNTOLEPANCED DIMENSIONS ARE FOR LIQUID MAKING
PROCESSING.
HEAT TREATMENT REFERS TO THERMAL PROCESSING
OTHER THAN NORMAL WASHING. O.I. EUROPE.
UNLESS ADVISED TO THE CONTRARY.
O.I. EUROPE. ALL RIGHTS RESERVED. NO PART THE
MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR
ARTICLE DERIVED WITHOUT WRITTEN PERMISSION.
DO NOT SCALE.

RADIAL BAR STIPPLING.
ES 02.04.27/1
80 BARS.
EXCEPT 0.30 DEEP.

NOTE: TENTATIVE FOR DEVELOPMENT ONLY
UNTIL APPROVED BY DESIGN REVIEW
AND A SUCCESSFUL SAMPLING.

